
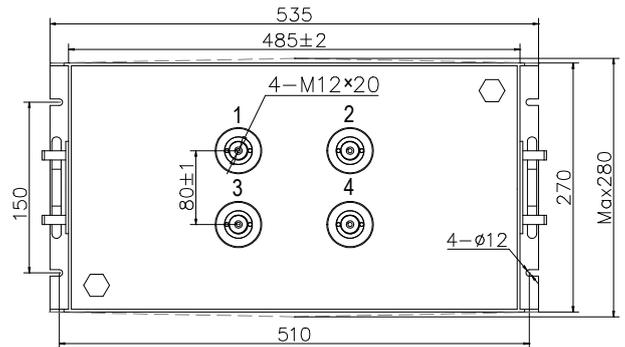
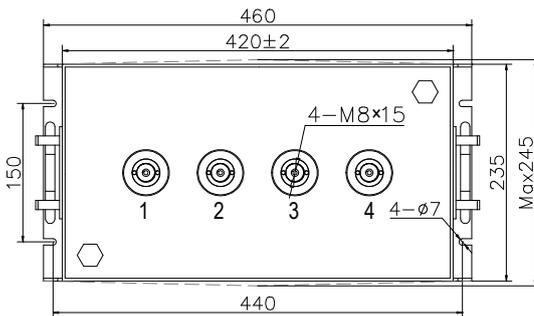

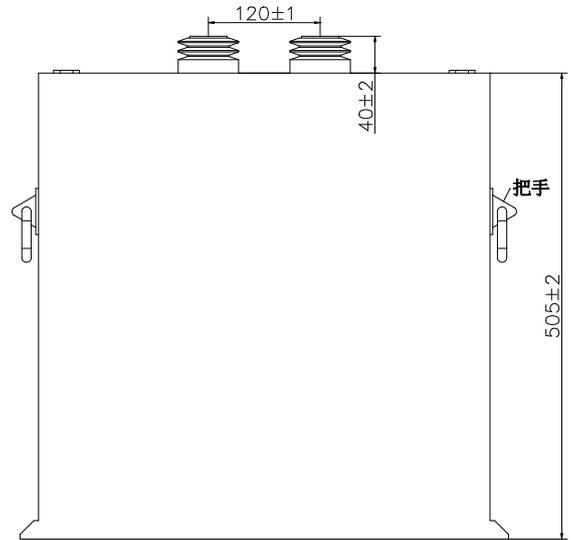


变频器 逆变器 DC-Link 脉冲

外壳： 不锈钢外壳封装
 工作温度： -40℃ 至 +85℃ (Ths≤85℃)
 容量范围： 定制 (±5%, ±10%)
 额定电压： 定制

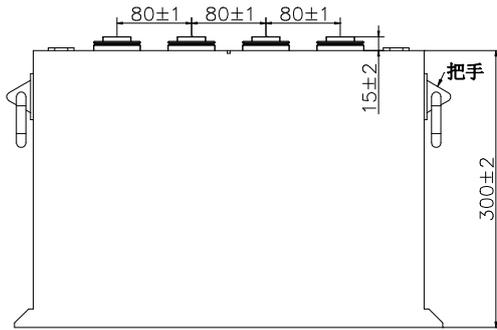

电路连接图

C1

D1

特性参数

| 订货代码 | 容量 (μF) | 外壳尺寸 (L*B*H) | $I_{\text{max}}@45^\circ\text{C}$ @1KHz(A) | L_s (nH) | I_{peak} (kA) | $\text{ESR}@1.0\text{KHz}$ (m Ω) | R_{th} (k/W) | 重量 (Kg) |
|---|-------------------------|-----------------|---|---------------|---------------------------|---|--------------------------|------------|
| Un 2000VDC , Us 3000V , Ur 450V | | | | | | | | |
| SHC-2000-3200-S | 3200 | C1 | 284 | ≤ 100 | 8.0 | 0.73 | 0.38 | 45.1 |
| SHC-2000-8000-S | 8000 | D1 | 286 | ≤ 100 | 16.6 | 0.73 | 0.25 | 92.9 |
| Un 2200VDC , Us 3300V , Ur 500 V | | | | | | | | |
| SHC-2200-2500-S | 2500 | C1 | 237 | ≤ 100 | 14.7 | 0.70 | 0.38 | 45.3 |
| SHC-2200-6200-S | 6200 | D1 | 289 | ≤ 100 | 29.9 | 0.72 | 0.25 | 93.3 |
| Un 2800VDC , Us 4200V , Ur 600 V | | | | | | | | |
| SHC-2800-1700-S | 1700 | C1 | 235 | ≤ 100 | 12.0 | 0.71 | 0.38 | 45.2 |
| SHC-2800-4500-S | 4500 | D1 | 289 | ≤ 100 | 26.0 | 0.72 | 0.25 | 93.4 |
| Un 3300VDC , Us 4950V , Ur 700 V | | | | | | | | |
| SHC-3300-1400-S | 1400 | C1 | 213 | ≤ 100 | 5.4 | 0.87 | 0.38 | 44.9 |
| SHC-3300-3500-S | 3500 | D1 | 272 | ≤ 100 | 11.3 | 0.81 | 0.25 | 93.5 |
| Un 4000VDC , Us 6000V , Ur 900 V | | | | | | | | |
| SHC-4000-800-S | 800 | C1 | 232 | ≤ 100 | 8.4 | 0.73 | 0.38 | 44.9 |
| SHC-4000-2000-S | 2000 | D1 | 286 | ≤ 100 | 17.3 | 0.74 | 0.25 | 93.2 |